



Performance	SI	US
Nominal displacement	0.06 m³/d/rpm	0.38 bpd/rpm
Pressure rating	260 bars / 26000 kPa	3800 psi
Pressure per cavity	4.6 bars / 460 kPa	70 psi
Number of engaged cavities	56	
Minimum/maximum speed	50/500 rpm, depending on application	
ISO 15136-1 compliance	V3/Q3 - Higher grade upon request	
Helix angle	34.6°	
Cavity flow area	423 mm²	0.66 in²

Stator Specifications	Standard		Flush		Slim	
	SI	US	SI	US	SI	US
Top connection (API nominal size)	2⅜" (60.3 mm) EUE Pin		2⅜" (60.3 mm) EUE Box		2⅜" (60.3 mm) EUE Box	
Bottom connection (API nominal size)	2⅜" (60.3 mm) EUE Pin		2⅜" (60.3 mm) EUE Pin		2⅜" (60.3 mm) EUE Pin	
Body outside diameter	71.0 mm	2.80"	71.0 mm	2.80"	68.0 mm	2.68"
Maximum outside diameter	77.8 mm	3.06"	77.8 mm	3.06"	77.8 mm	3.06"
Maximum outside diameter if special clearance couplings are used	73.9 mm	2.91"	73.9 mm	2.91"	73.9 mm	2.91"
Length	5.22 m	17' 1.4"	7.05 m	23' 1.5"	7.05 m	23' 1.5"
Weight	106 kg	234 lb	118 kg	261 lb	100 kg	221 lb
Number of elements	4		4		4	
Top bushing or tag bar	Available		Available		Available	
Notes			Includes 6.0 ft pup joint		Includes 6.0 ft pup joint	

Rotor Specifications	SI	US
Top connection (nominal size)	¾" (19.1 mm) API Pin	
Total length	5.71 m	18' 8.6"
Helix length	5.50 m	18' 0.5"
Weight	21 kg	46 lb
Minor diameter	23.5 mm	0.925"
Major diameter **	32.5 mm	1.280"
Head diameter	40.0 mm	1.575"
Maximum OD with full size coupling	41.3 mm	1.625"
Maximum OD with slimhole coupling	40.0 mm	1.575"
Orbit diameter with full size coupling	50.3 mm	1.980"
Orbit diameter with slimhole coupling	49.0 mm	1.929"
Coating type	Chromium	
Coating thickness	Information upon request	
This pump is available as (optional):	PCM Slugger	
This pump is available with (optional):	Paddle rotor	



Completion Considerations
Stator maximum OD must be less than casing drift diameter (some extra clearance is recommended)
Rotor maximum OD must be less than tubing drift diameter
Rotor orbit diameter must be less than pup joint drift diameter


**The major diameter is nominal. For clearance calculations, please refer to the maximum rotor OD.

Contact your PCM representative for an operator's manual

Top and bottom stator connections can be customized as required (pin/pin, box/box, etc., or changes in size in some cases)

With a paddle rotor, the rotor length is extended by 600 mm (2 ft). Contact PCM for further details.

This is not a contractual document. PCM reserves the right to make changes at any time.

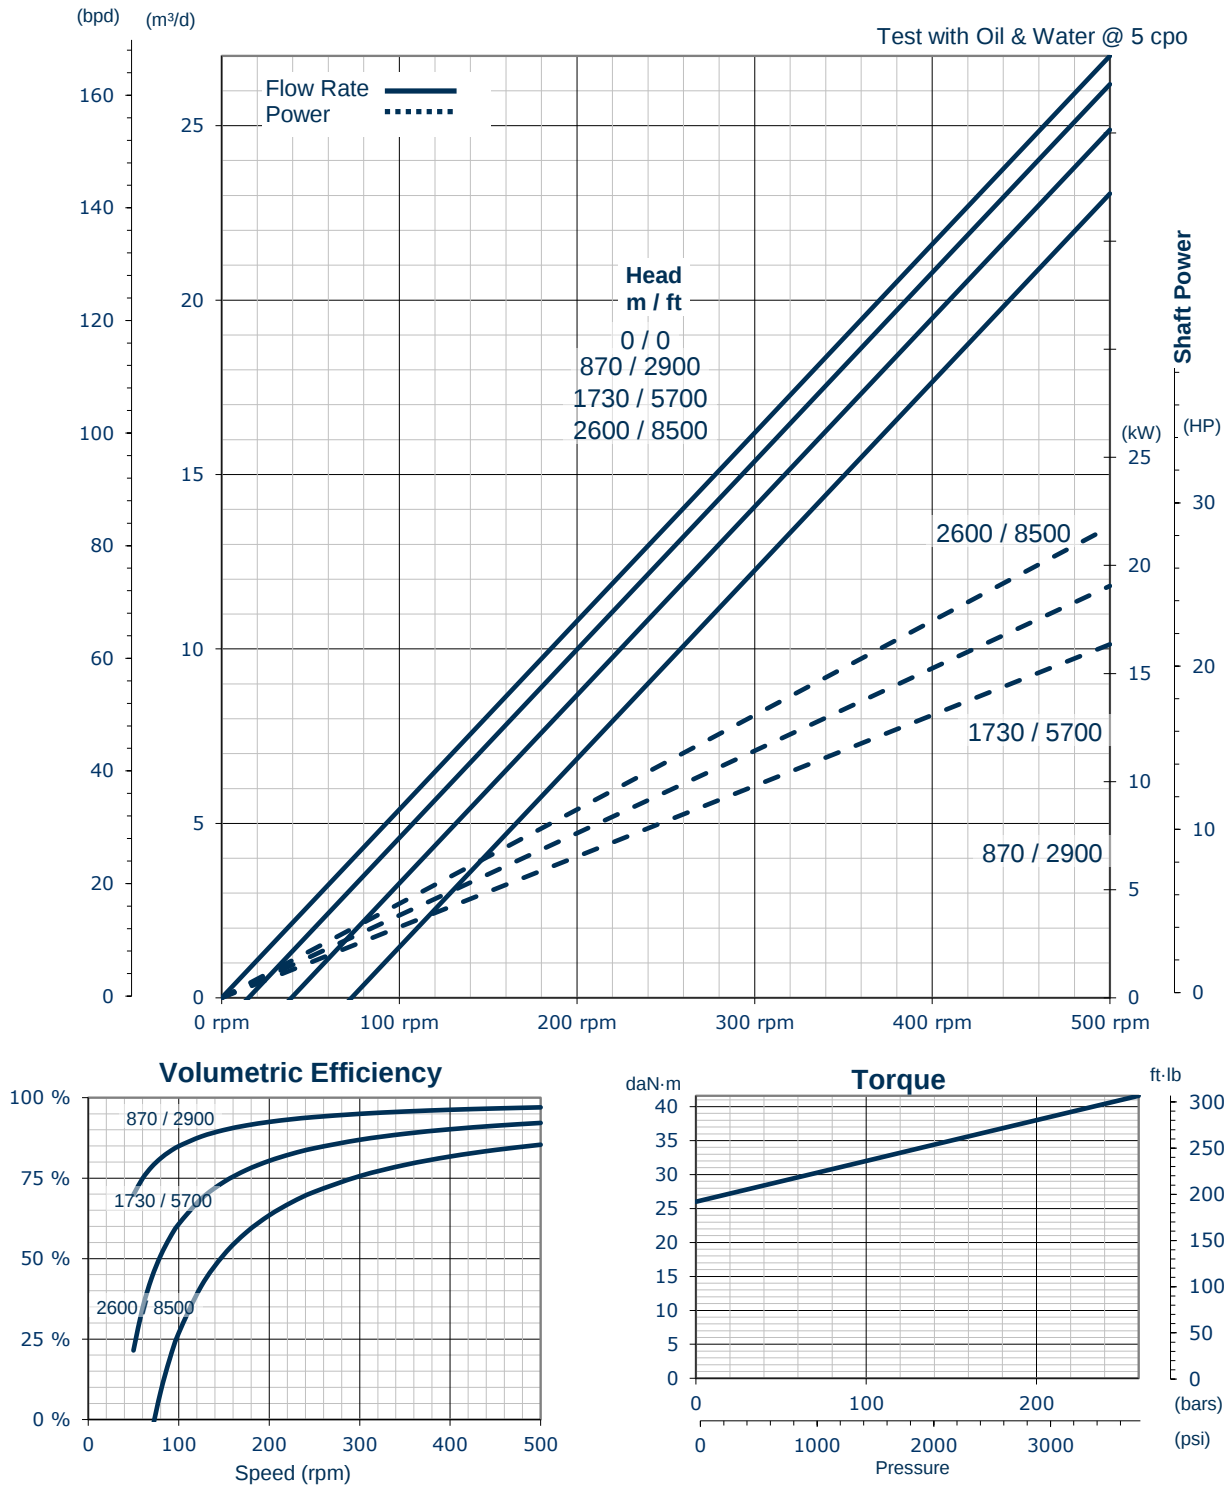

The flow rate chart is calculated using the validated displacement for this pump.

Revision Number 1-3-2 (2022/6/30)